Delft3D-Modelling of Hydrodynamic and Water Quality Processes in San Diego Bight

PI: Ap van Dongeren, Ph.D.
Deltares
PO Box 177
2600 MH Delft
The Netherlands

phone: +31-(15) 2840848 fax: +31-(15)2858710 email: Ap.vanDongeren@deltares.nl

Award Number: N00014-08-1-1016 http://www.deltares.nl

This work is a cooperation with Dr. Eric Terrill (SIO Scripps), Dr. Lyle Hibler (PNL) and Mark Moline (CalPoly) who are funded separately.

LONG-TERM GOALS

The long-term goal of this effort is to demonstrate the applicability and performance of the Delft3D hydrodynamic/morphodynamic software system to the case of the hydrodynamics and contaminants dispersal and advection. Delft3D has until now been applied extensively to strongly astronomical, wind and wave-forced (shelf sea and nearshore) conditions but not to the weakly-forced conditions such as occur off the California coast. This is of interest to the Navy because of naval operations and the presence of a Navy SEAL training ground just north of the Tijuana River outlet.

In a separate task, the performance of Deltares' river model SOBEK is evaluated for the case of the Pearl River (MS,LA), also of interest to the Navy with respect to training grounds near Stennis Space Center (MS).

OBJECTIVE

The objective of this study is to demonstrate the capabilities of the Delft3D hydrodynamic system by developing a multi-domain (nested) cascade of models ranging from the Southern California Bight scale to the nearshore area around the Tijuana River mouth and Imperial Beach. The model is to be driven with boundary conditions from a larger ocean shelf model (wind, tides, salinity, temperature, etc.) for a number of rainfall events (scale of days and weeks), and to be validated against measured data inside the domain.

An analysis will be made of what conditions determine the trapping and mixing of the plume inside the surfzone and/or the propagation of the plume through the breakers and onto the coastal shelf, and – through a data denial study – what physical processes are important.

For the Pearl River, a demonstration will be given of the performance of the SOBEK river model.

maintaining the data needed, and c including suggestions for reducing	lection of information is estimated to ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding and DMB control number.	tion of information. Send commen larters Services, Directorate for Inf	ts regarding this burden estimate formation Operations and Reports	or any other aspect of the property of the contract of the con	his collection of information, Highway, Suite 1204, Arlington
1. REPORT DATE 2010	2. REPORT TYPE		3. DATES COVERED 00-00-2010 to 00-00-2010		
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER	
Delft3D-Modelling of Hydrodynamic and Water Quality Processes in San Diego Bight				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Deltares,PO Box 177,2600 MH Delft,The Netherlands,				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAIL Approved for publ	LABILITY STATEMENT ic release; distribut	ion unlimited			
13. SUPPLEMENTARY NO	TES				
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFIC	17. LIMITATION OF	18. NUMBER	19a. NAME OF		
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)	OF PAGES 5	RESPONSIBLE PERSON

Report Documentation Page

Form Approved OMB No. 0704-0188

APPROACH

The work is divided into 4 tasks

- 1. Application of the Delft3D model to the San Diego Bay and coastal region
- 2. Enhancement of the Delft3D system for operational use
- 3. Peal River modeling using SOBEK
- 4. Development of beta-version of San Diego Delft3D model in nowcast/forecast model

WORK COMPLETED

1. Application of the Delft3D model to the San Diego Bay and coastal region

We have set up a Delft3D sea shelf model, coupled it with a larger-scale model and/or data to provide boundary conditions, including flow boundary conditions and solar radiation. In this way the hydrodynamics of the eddies in the San Diego Bight can be simulated. We use point-source contaminants at the Tijuana River Mouth as input in order to perform simulations of the plume contaminant dispersal and water quality conditions on the San Diego Bight. Specifically, we performed 1-month model simulations at the time of rainfall events (February 2009) to analyze model success at simulating local processes.

Only recently COAMPS and NCOM data has become available for this period which will be used to drive the already set up model. We will show the deterioration of the performance of the model through a data-denial study. will be analyzed in order to determine the optimal input of data. Impacts of mixing of the contaminants across the surf zone will be examined. It is expected that in high-surf, in combination with the low river jet momentum conditions, the plume will be trapped within the surf. In contrast, it is expected that in higher river jet momentum conditions, the plume will quickly cross the surf. Additional complexity can occur when high shear is present between the wave-driven long-shore currents within the surf and offshore wind/tidal/pressure gradient forced currents move in opposite directions. Scientific or technological objectives of this effort.

In order to do the analysis a "drifter" code modification has been made in the code which allows numerical drifters to move horizontally in water column along a prescribed path in order to simulate REMUS trajectories. At each horizontal position all variables in the entire vertical will be stored. Given a known vertical position of the instrument the local value of any variable can be retrieved from this column of data

2. Enhancement of the Delft3D system for operational use

We have implemented a roller-model routine in Delft3D-FLOW, which is able to calculate the wave directions independently of SWAN on the FLOW grid. This module has been tested extensively.

This calendar year a mass balance diagnostics module will be added to the Delft3D code.

3. Pearl River modeling using SOBEK

Three visits have been made to NRL-Stennis to demonstrate the capabilities of the SOBEK model, and to make an implementation of the river shed using available online data and discharge events.

The model set-up is conducted with the two hydrodynamic modules "Flow" (1D) and "Overland Flow" (2D). For demonstrating the range of possible modelling options in the software, we set-up different models: i) 1D only model, ii) 2D only model, iii) a combined 1D2D model. Results are still forthcoming.

4. Development of beta-version of San Diego Delft3D model in nowcast/forecast mode

This work is projected for the coming year.

RESULTS

The curvilinear mesh of the San Diego Bight covers the 30 km stretch of coast from Rosarito (Mexico) to Solana Beach see Figure 1. In order to capture the temperature and salinity stratification in San Diego Bight, it is necessary to run the model in 3D mode. For this purpose, 20 vertical sigma layers are defined. The largest vertical density gradients in the model are expected to occur close to the water surface and this is where the highest vertical resolution is required.

Setting up boundary conditions for the model has turned out to be one of the most challenging problems in this project so far. Multiple configurations of boundary condition types, such as water levels, velocity and Neumann (water level gradient) forcing have been tested along the three (southern, western and northern) open boundaries. The application of water level boundaries in the San Diego Bight model often gives rise to large instabilities in the form of high velocity water jets entering the model domain. It is thought that the strong vertical density variation in combination with relatively weak forcing agents (weak tidal currents, low wind velocities) causes these instabilities. The jets cause unrealistic vertical mixing and large velocities inside the model domain. Using current and Neumann boundaries conditions along the lateral boundaries generally causes unrealistic upwelling close to the shore.

An important finding is that only the use of Riemann (weakly-reflective) boundaries yielded both stable and realistic results. Although these are more cumbersome to set up (one needs both normal velocities and water levels at each boundary) and to some extent cause some loss of control over the water level inside the model domain.


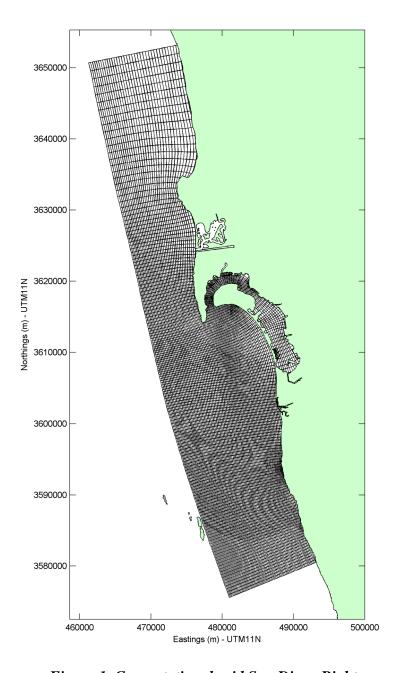


Figure 1. Computational grid San Diego Bight

It is important to get an estimate of what the model's sensitivity to different input parameters. For this purpose, a sensitivity analysis has been carried out in which the following changes have been made with respect to a reference simulation

- No wind
- No heat exchange with the atmosphere
- No currents on the southern boundary

Results are shown in the following figure and indicate that it is important to have wind forcing, heat exchange and currents on the boundary all turned on in the model, i.e. no process is dominant.

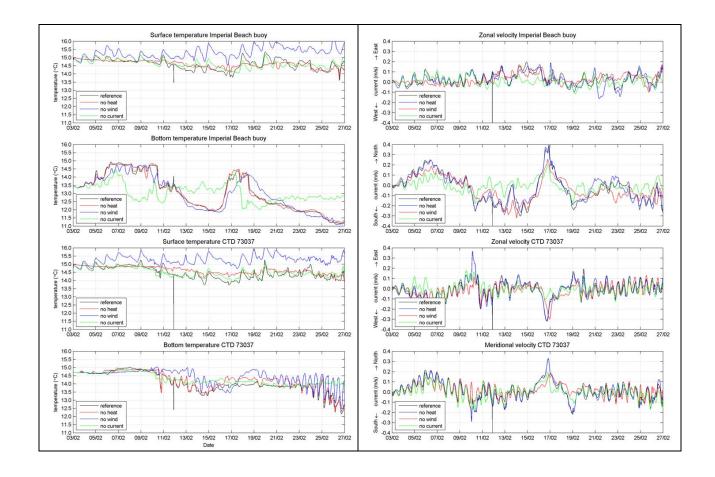

IMPACT/APPLICATIONS

The model results so far show that the Delft3D model is capable of simulation the essential processes in the San Diego Bight and can be forced by an outer model, and wind forcing. This tool has the potential to deliver real time forecasting/nowcasting capabilities in this region.

TRANSITIONS

The Delft3D model software and code is accessible to ONR under the existing DELFT3D license of contract N00014-02-C-075, dated October 3, 2002.

RELATED PROJECTS

This work is a cooperation with Dr. Eric Terrill (SIO Scripps), Dr. Lyle Hibler (PNL) and Mark Moline (CalPoly) who are funded separately.